





Samples available: Immediatley
Start of sale: Immediatley

**Tweeter** 

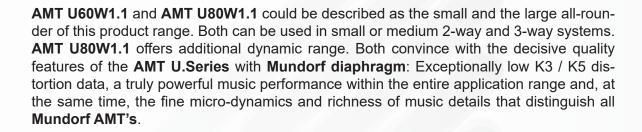

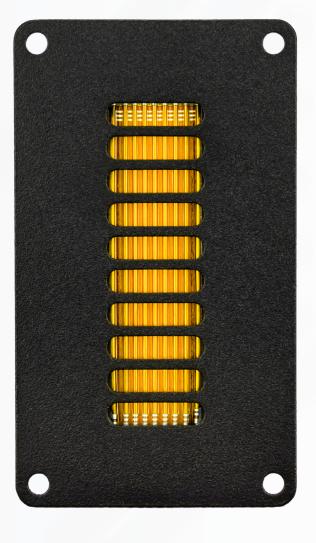






Specifications		
Nominal Impedance		4 Ω
DC Restistance $(R_{dc})$ $(Z_{min})$		4.4 Ω
Sensitivity (2,83 V / 1m) <sup>1</sup>		94 dB
Resonance Frequency (FS)		2150 Hz
Frequency Response ( -6dB)		1.8 kHz - 31 kHz
Frequency Response (-10dB) <sup>1</sup>		1.4 kHz - 34 kHz
Crossover from (filter 12dB/6dB/Oct.)		2.0 kHz / 3.0 kHz
Nominal Frequency Range <sup>3</sup>		2.2 kHz - 31 kHz
Power Handling, long term 1, 2		15 W
Power Handling, short term 1, 2		90 W
Max. Input Voltage, long term 1, 2		$7.7  V_{rms}$
Max. Input Voltage, short term 1, 2		19 V <sub>rms</sub>
Effective Piston Area		31.4 cm <sup>2</sup>
Total Weight		0.360 kg
Face Plate		optional


1) according to IEC 60268-5
2) via High Pass Filter, Butterworth 2200 Hz 12 dB/Okt.
3) according to power measurement

## Measurements

SPL Horizontal 0° - 15° - 30° - 45° - 60°

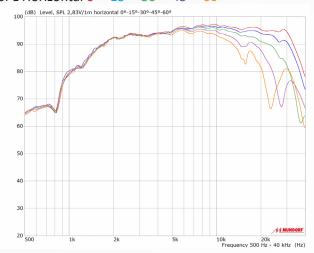


SPL Vertical 0° - 10° - 20° - 30° - 45°

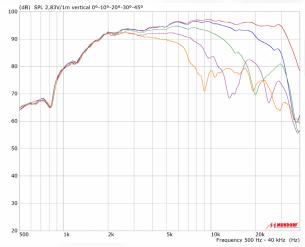





## Measurements

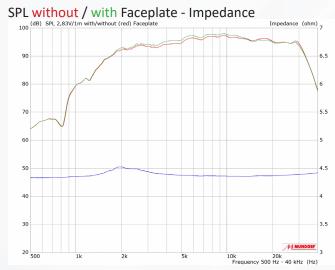


Harmonic Distortion 2.83 V

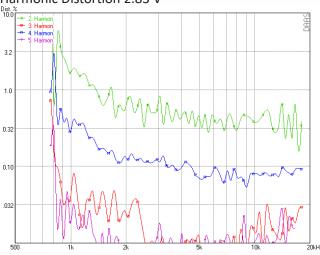


Waterfall

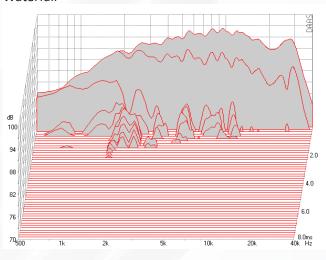


SPL - Phase

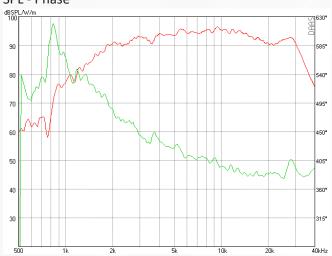

Impulse Response

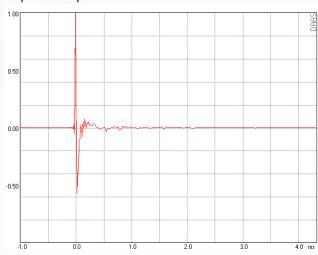



Step Response

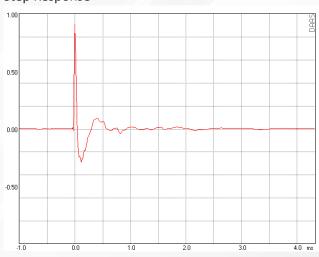





## **Dimensions**

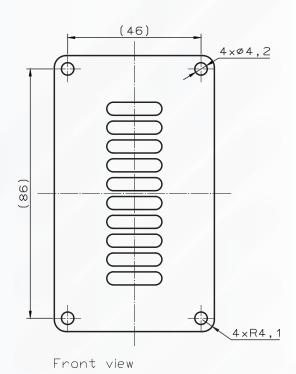

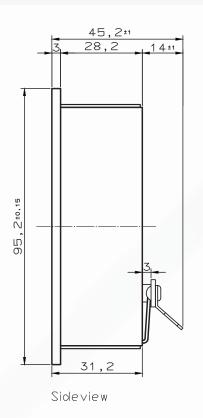

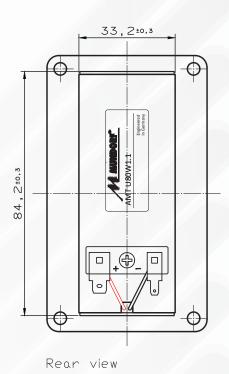



_	55,2±0,15	
1-		
Тор	view	

	Dimensions	Tolerance
Length	95 mm	+ 0,5 mm
Width	55 mm	+ 0,5 mm
Depth including terminal	45 mm	+/- 1 mm

